

Backup Value Series

Value600/800/1000EILCD

VAEBD0014EU-00

A Solid Power Protection from the Inside Out

CyberPower[®]
Reliability. Quality. Value.

The Value Series UPS with GreenPower UPS™ Technology offers home and small office users clean and stable battery backup while the featured RJ11/RJ45 port ensures phone, fax, and modem lines are protected from surges. With Automatic Voltage Regulator (AVR) stabilizes the AC signal and maintains a safe voltage, this allows the UPS to maintain safe power levels for the connected equipment without resorting to battery power. The multifunction LCD readout provides immediate access to precise information of critical power/battery condition.

The included PowerPanel® Personal Edition management software showcases the feature-rich abilities such as input/output power voltage readings, self-diagnostics, and approximate battery backup time. With the Energy-Saving Technology, the Value Series UPS could improve the operating efficiency and eliminate the waste energy consumption.





Applications

- Home and Home Office
- Home Theater System
- Small Office
- Medium Business

Series Features

- GreenPower UPS™ Technology
- Automatic Voltage Regulator (AVR)
- EMI, RFI, Surge and Spike Protection
- Phone/Fax/Modem/DSL/Network Protection
- Auto-Restart/Auto-Charge
- LCD Status Monitor
- USB & Serial Connectivity Ports
- User-Replaceable Batteries
- PowerPanel® Personal Edition Software

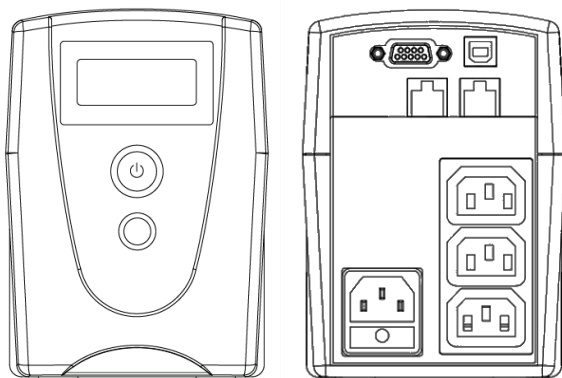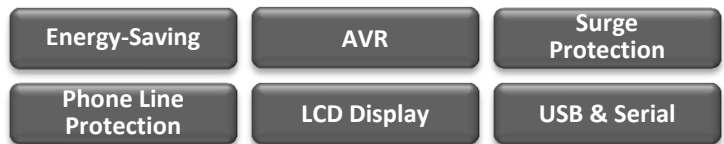

Front

Back

ENERGY-SAVING TECHNOLOGY



GreenPower UPS™ Technology

The patented advanced energy-saving technology improves the UPS operating efficiency and eliminates waste energy consumption.

POWERPANEL® PERSONAL EDITION S/W

Auto-shutdown Software



Compatible with Windows 8, Windows 7, Vista, XP; Windows Server 2012, 2008, 2003. Software compatible with Mac and Linux is available for download from our website.

*Software functions may vary due to firmware version and/or hardware constraints.

Backup Value Series

Value600/800/1000EILCD



Technical Specification

Model Name	VALUE600EILCD	VALUE800EILCD	VALUE1000EILCD
General			
UPS Topology	Line-Interactive		
Energy Saving	Yes		
Input			
Voltage	230Vac		
Input Voltage Range	165Vac - 280Vac		
Input Frequency Range	50/60Hz ± 3Hz (Auto-sensing)		
Plug Type	IEC 320 C14		
Output			
VA	600	800	1000
Watts	360	480	550
On Battery Waveform	Simulated Sine Wave		
On Battery Voltage	230 Vac ± 10%		
Automatic Voltage Regulation (AVR)	Single Boost		
On Battery Frequency	50/60Hz ± 1%		
Outlets - Total	3		
Outlet Type	IEC 320 C13		
Outlets - Battery & Surge Protected	3		
Transfer Time	4ms		
Battery			
Runtime at Half Load (min)	8		7
Runtime at Full Load (min)		1	
Battery Type	Sealed Lead Acid		
Battery Quantity	1		
Typical Recharge Time	8 Hours		
Surge Protection & Filtering			
Surge Suppression	125 Joules (L-N)		
Phone / Network Protection	1-In, 1-Out		
Management & Communications			
HID Compliant USB Port	Yes		
Serial Port	Yes		
Audible Alarms	On Battery, Low Battery, Overload, Fault		
Software	PowerPanel® Personal Edition		
Physical			
Form Factor	Tower		
Physical - UPS Module			
Dimensions (WxHxD) (mm.)	100 x 140 x 300		
Weight (kg.)	4.6	5.2	5.5
Environmental			
Operating Temperature	+ 32°F to 104° F / 0° C to 40° C		
Operating Humidity	0% - 90% non-condensing		
Operating Elevation	0-3000 meters		
Storage Temperature	- 4°F to 122° F / -20° C to 50° C		
Storage Relative Humidity	0% - 90%		
Online Thermal Dissipation	99 BTU/hr	102 BTU/hr	109 BTU/hr

#All specifications are subject to change without notice. ©2014 CyberPower Systems. All Trademarks are the property of their owners.



DISTRIBUTED BY:

CyberPower's
Manufacturing
Facilities are
ISO 9001:2000,
ISO 14000, and
QC080000
Approved