





BUY ON
www.cablematic.com

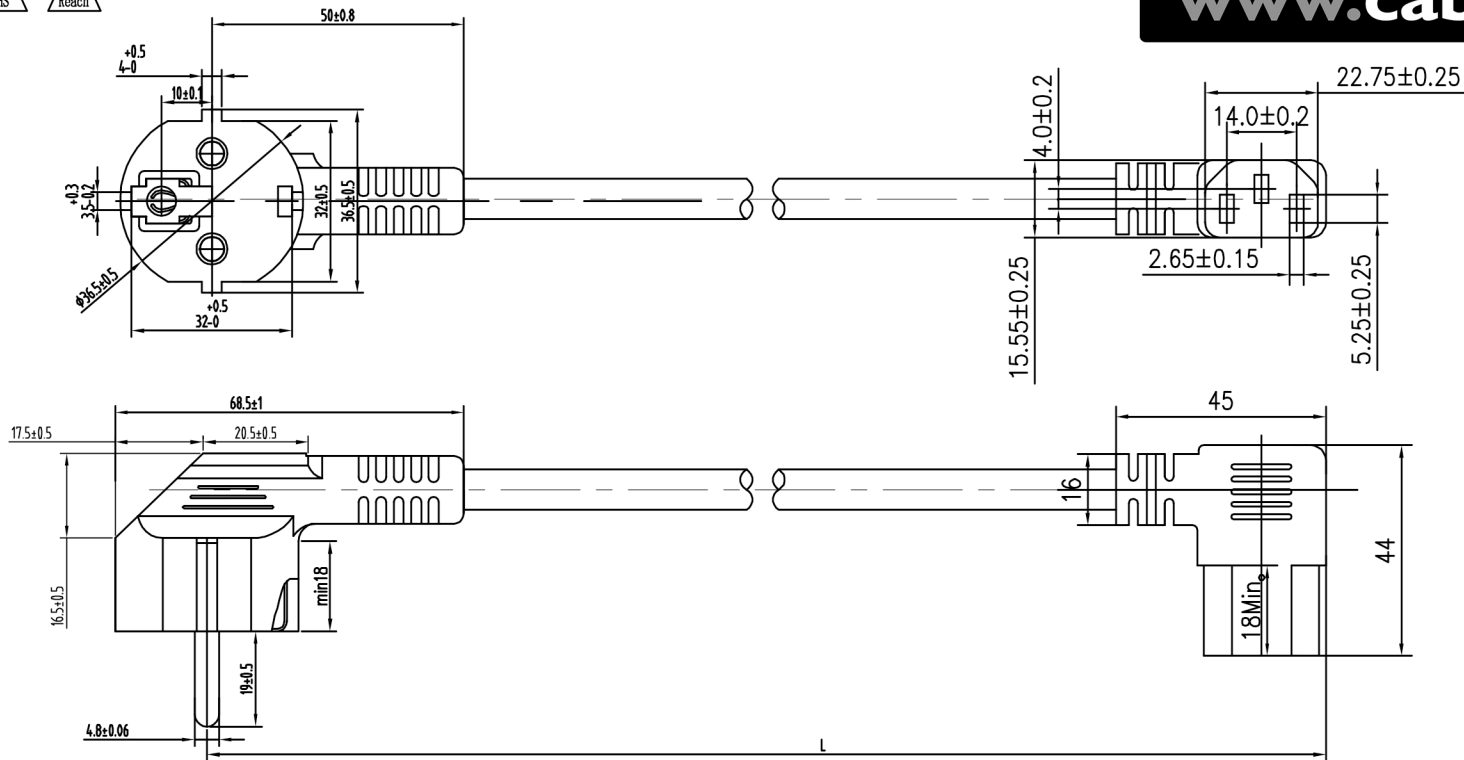

Notes;

- 1.Plug: JT003/JT-ST3W 16A 250V~ Clear injection, no scrath and dirt
- 2.Cable:H05VV-F 3X1.0 mm²Jacket φ6.8±0.1 Conductor32×0.2,
Core φ2.6±0.1
Cable Mark : <VDE> H05VV-F 3X1.0mm²
- 3.Test: Hi-Pot : Inner Voltage AC2500V/1S、 External Voltage AC6000V/1S、 current leakage 1mA, insulation resistance no less than 50MΩ, no strike out

1			1800±20mm	Black
Item	Customer Model	Model/No.	Length(mm)	Color
P.N	CABLE MATIC	Item	Drw. N	
Dre By			Date	
Check By		比例	1 : 1	mm
		投影		
		xx±0.15 .x'±0.15 .xxx±0.25 .xx'±0.25 .xxxx±0.38 .xxx'±0.38		